


RELIABLE STORAGE AND GARAGE TENT  
3m x 58m x 2m/2,87m

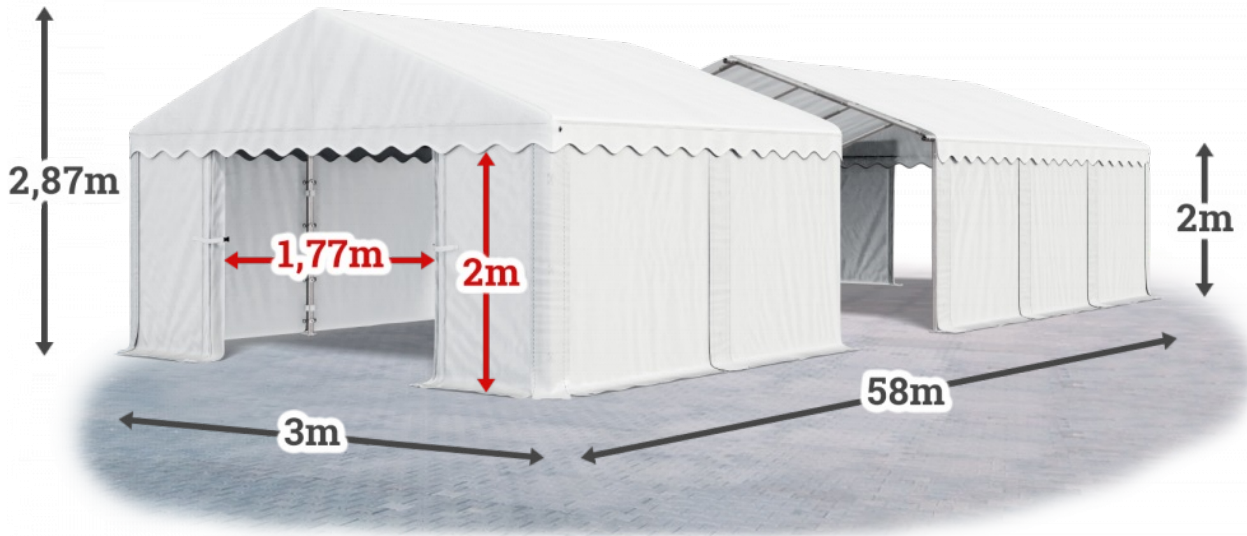

Construction

**SUMMER** ●

Roof cover

PE ab. 240 g/m<sup>2</sup> PE

Side cover

PE ab. 240 g/m<sup>2</sup> PE

Masking stripes

White

Entry no. 1 - Entry PE

ab. Wight 1,77m x Height 2m

Entry no. 2 - Entry PE

ab. Wight 1,77m x Height 2m

Technical data

Size and weight

Width: 3m

Lenght: 58m

Sections: 2m

Height of the side wall: 2m

Height of the peak: 2,87m

Area: 174m<sup>2</sup>

Volume: 423,34m<sup>3</sup>

Tarpaulin

Roof tarpaulin: ab. 240 g/m<sup>2</sup>

Side tarpaulin: ab. 240 g/m<sup>2</sup>

Air-Control System: NO

Hermetic System: NO

Floor Skirt: NO

Multi-Size System: NO

Entry no. 1 - Entry PE: ab. Wight 1,77m x Height 2m

Entry no. 2 - Entry PE: ab. Wight 1,77m x Height 2m

Construction

Tube diameter: ab. 38mm

Tube thickness: ab. 1,2mm

Connector diameter: ab. 42mm

Connector thickness: ab. 1,3mm

Tent feet: ab. 6-9cm

Total amount of packets: 60 Combined weight: 573.65kg


Rigid construction: **SUMMER**





Main construction is based on steel tubes ab.  $\varnothing$  38mm and connectors ab.  $\varnothing$  42mm. galvanized construction. Through and through screws guarantee reliable connection. Feet of the marquee: 6 by 9 cm.

## Features of the construction




### More rigid construction Steel lines at entrances

In the upper part of the constructions, the steel ropes are mounted. Thanks to them, the structure is more rigid and stable. They also allow you to move the entrances freely.



### Many years of operation Strong galvanized pipes

We use steel of the highest quality, additionally protected against corrosion by galvanizing, which increases the strength of construction elements and provides long-term operation. Bearing pipes have a fi diameter of ab. 38 mm, while the connectors are enlarged to ab. fi 42 mm.



### Reliable connecting of elements

#### The screws passing through

We use the most reliable method of connecting the pipes with bolts passing through in our tents. This is the only reliable way of connecting elements.

⚠ Tents with snaps or with bolts screwed in and NOT passing through, do not provide safe and permanent installation!



### Strong connection of pipes Connectors ab. 42 mm diameter

Pipes have thick connectors - ab. 42 mm diameter. All are dip-hot galvanized, which makes their durability even better.



### Stable assembly Feet with anchor holes

The feet with anchor holes secure stable tent assembly on any surface. They provide a solid attachment of the tent to the ground. The feet were dip-hot galvanized, which increases their durability.



## Durable tarpaulin: PE ab. 240 g/m<sup>2</sup> PE



240  
g/m<sup>2</sup>



PE tarpaulin is only designed for use in Spring and Summer time. We only use durable PE material. The strong tarpaulin ab. 240g/m<sup>2</sup> resists UV rays and temperatures between 5 degrees Celsius below zero and 40 degrees Celsius above zero. It weights ab. 240g/m<sup>2</sup>. It is also waterproof in 100%. Sidewalls are equipped with retention apron.

### Features of the tarpaulin



#### Modern way of joining tents

You can merge tents as you like

The tent 3m x58m 2m is composed of tents: 3x4m, 3x6m, 3x8m.



#### Ideal storage room

Full walls

Tent sidewalls are made of PE ab. 240g/m<sup>2</sup>. Tents with this kind of walls can be used as a: storage room, car wash or a workshop. The basic wall height is 2m.



#### Change colours

Colour Mix system

The tent has masking panels, mounted on Velcro. They are available in different colours. This allows you to quickly and easily change the colour of the tent. Just buy the masking panels in the right colour.



#### Adjust tent to your needs

Any combination of the walls

You can order individual parts of cover, such as a wall with windows or full walls. Personalize a tent and adjust them to your individual needs.



#### Arbitrary arrangement

Comfort of use

The side walls are mounted to the construction every 2 meters with the elastic rubber with a ball. The tent can be arranged in any way, according to the needs.



#### Convenient opening

The curtain gate

Both of the entrances consist of two wings which can be slid to the sides one by one or as a whole. The whole cover can be disassembled which will result in an entrance of the width matching the width of the entire tent.

## Additional paid features



### Increased durability

#### The roof and floor construction

Additional construction consists of a lower frame, the upper reinforcements and horizontal and vertical roof braces. This solution provides greater load capacity and structure rigidity. It also allows you to use tent during unfavourable weather conditions.



### Lifting set

#### Expand your space

You can buy a special set to lift the side walls. You can lift one or more walls, in order to gain more space.



### Stable construction

#### Strong feet 9 cm diameter.

In the lower part of the structure, stable feet with a diameter of 9 cm can be mounted. Thanks to them anchoring of the tent is much more durable, regardless of the type of the ground. The feet are galvanized, which increases their durability and allows long-term use.



### Attractive appearance

#### Ledged window

The sidewall is made of thick PE ab. 240 g/m<sup>2</sup> canvas cover and a large ledged windows. The basic wall height is 2m. With the windows placed on each two-meter segment, the tent looks aesthetically. It will be perfect as a trade, exhibition or a party tent.